

# AXIS T95A Series Dome Housing

*Protect your Axis Network Dome Cameras*

*AXIS T95A Series Dome Housing is a top opening system, designed to give easy access to the camera, cabling and connections for efficient installation.*



**TOP OPENING SYSTEM** > Top opening system designed for easy access.

**EASY INSTALLATION** > Pre-mounted heaters, blower and power supplies for easy installation.

**SUPERIOR OPTICAL CLARITY** > Smoked or clear dome with superior optical clarity, designed for cameras with x 35 zoom.

**IP 66 RATED** > IP 66 rated for indoor and outdoor installations.

**ENHANCED HEATING SYSTEM** > Operates in temperatures down to -30 °C (-22 °F).



## TECHNICAL SPECIFICATIONS – AXIS T95A SERIES DOME HOUSING


<b>Models</b>	AXIS T95A00 Dome Housing (5010-001) AXIS T95A10 Dome Housing (5010-101)	<b>Accessories (included)</b>	Sunshield, thermostat controlled heaters and blower, power supply for Axis network cameras, smoked and transparent lower hemisphere, installation guide
<b>Supported cameras</b>	AXIS 213 PTZ, AXIS 214 PTZ, AXIS 215 PTZ, AXIS 231D+, AXIS 232D+ and AXIS 233D Network Cameras	<b>Accessories (not incl.)</b>	T95A61 Wall bracket (5010-611) T95A64 Corner bracket (5010-641) T95A67 Pole bracket (5010-671)
<b>Power</b>	AXIS T95A00: Input 100/240 V AC, 50/60 Hz Output 24 V DC, max 1,5 A or 12 V DC, 3 A AXIS T95A10: Input 24 V AC Output 24 V AC or 12 V DC, 2 A	<b>Approvals</b>	CE according to EN61000-6-3, EN 60950, EN50130-4 IP66 according to EN 60529
<b>Operating conditions</b>	AXIS 213 PTZ : -20 °C to 35 °C (-4 °F to 95 °F) AXIS 214 PTZ : -25 °C to 40 °C (-13 °F to 104 °F) AXIS 215 PTZ : -25 °C to 40 °C (-13 °F to 104 °F) AXIS 231D+/232D+ : -20 °C to 50 °C (-4 °F to 122 °F) AXIS 233D: -30 °C to 45 °C (-22 °F to 113 °F)	<b>Dimensions (HxWxD) and weight</b>	External dimensions with sunshield: Ø 351 x 335 mm (13.8 x 13.2 in) External dimensions without sunshield: Ø 314 x 322 mm (12.4 x 12.7 in) 3.8 kg (8.3 lb)
<b>Casing</b>	Die-cast aluminum Epoxy polyester powder painting, RAL9002 Removable sunshield in ABS for outdoor, RAL9002		

Please visit the Axis web site at [www.axis.com](http://www.axis.com) for a comprehensive list of the available brackets and accessories.

31281/EN/R1/0802

## DIMENSIONS

Measurements in millimeters (inches)

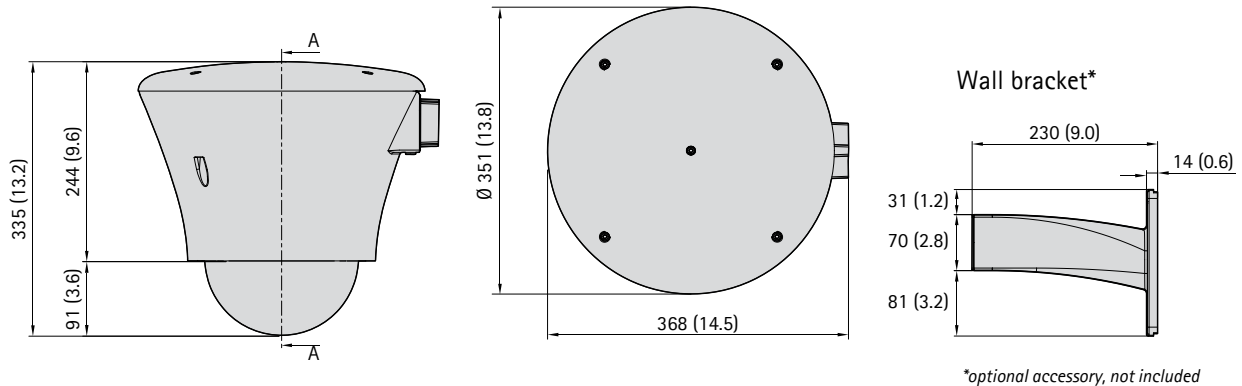

[www.axis.com](http://www.axis.com)

©2008 Axis Communications AB. AXIS COMMUNICATIONS, AXIS, ETRAX, ARTPEC and VAPIX are registered trademarks or trademark applications of Axis AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice.

**AXIS**<sup>®</sup>  
COMMUNICATIONS

Channel Partners **Kwick Soft Solutions Pvt Ltd**, Chennai, India.